


FATD (101x20 Displayed)

Flat deck Style, Aluminum Frame, Tandem, Deck over Axle Trailer

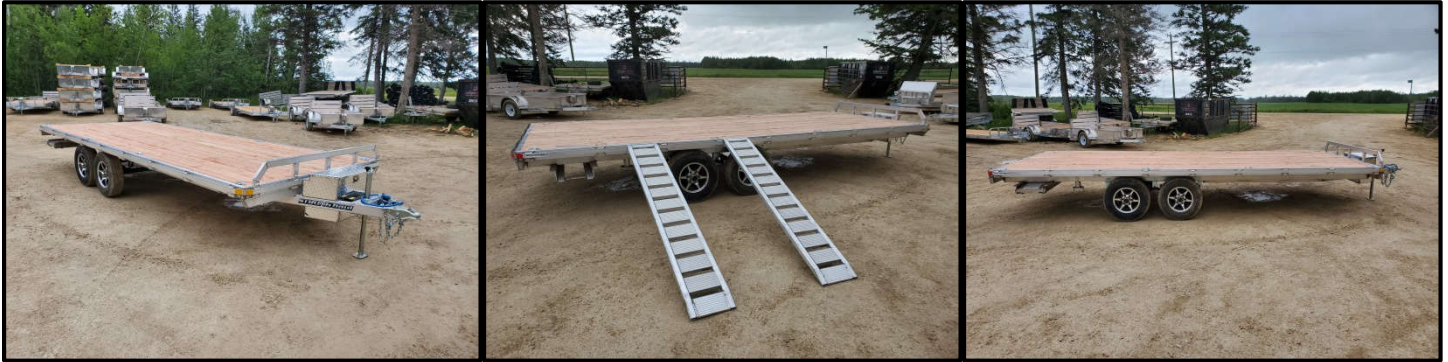

-Standard Features and Equipment-

| | |
|---|--|
| -6061 All Aluminum Frame | -2x8 Douglas Fir/Larch Plank Floor |
| -3500lb Straight Axles, Elec. Brakes (Changes to 5200lb axles on -52 models) | -3/8" x 35" Safety Chains, 16.2K lb Rating, with Safety Latch |
| -Zinc-Plated Axle Mounting Brackets with Polypropylene Tape | -Folding Rear Ramp rated at 3000lbs |
| -7-Pin RV Style Electrical Connector | -Pocket Style Ramps, Mounts under Rear of Deck, 2,500lb CAP/Ea 78" L x 14" W |
| -Junction Box, Break-away Kit with Battery and Charger | -Stake Pockets and Side Rub Rail All Around |
| -2-5/16" Ball Coupler, Max rating 2,100lb tongue WT, with Polypropylene Tape | -4,000lb Lashing Rings, ZP (6 rings on 14' models, 6 on 16', and 8 on 18') |
| -ST205/75R15 6-ply Radial Tires (ST225/75R15 7-ply tires for -52 models) | -Spare Tire Mount (Changes from front to side depending on tool box) |
| -Modular-Style Steel Wheels, R15", 5 lug on 4.5" BHP, Black (6 on 5.5" for -52) | -Deck to Ground Height: 30" |
| -LED Lighting Package | -Ground to Coupler Height: 17" When Level |
| -Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone | -GVWR: 7000lbs on -35 models (9,980lbs on -52 models) |
| -A-Frame Mounted Jack Rated at 5K lbs | |

-Available Sizes -35 Models-

| Description | Payload | Dry Wt. |
|--------------------------------|-----------|----------|
| FATD-101x14-35 | 5,405 lbs | 1595 lbs |
| FATD-101x16-35 | 5,057 lbs | 1943 lbs |
| FATD-101x18-35 | 4,709 lbs | 2291 lbs |
| FATD-101x20-35 | 4,360 lbs | 2640 lbs |

-Available Sizes -52 Models-

| Description | Payload | Dry Wt. |
|--------------------------------|-----------|----------|
| FATD-101x14-52 | 8,345 lbs | 1645 lbs |
| FATD-101x16-52 | 7,997 lbs | 1993 lbs |
| FATD-101x18-52 | 7,649 lbs | 2341 lbs |
| FATD-101x20-52 | 7,301 lbs | 2689 lbs |

-Available Options-

| Description |
|---|
| Aluminum Wheel Upgrade PKG |
| Spare Wheel, Steel |
| Spare Wheel, Aluminum |
| Extra Lashing Rings 4k lb |
| Recessed Lashing Rings 6k lb |
| Jack Caster Wheel |
| Side Mount Pivot Jack |
| 2-5/16" Adjustable Coupler |
| Front Rail Kit, Bolt In |
| A-Frame Mounted, Lockable Handle Tool Box |

*Note: Payload is an estimated amount and actual may vary, refer to VIN tag for more info.