


WATF (66x10 Displayed)

Water Hauler, **A**luminum Frame, **T**andem Axle, **F**lat Bed Trailer

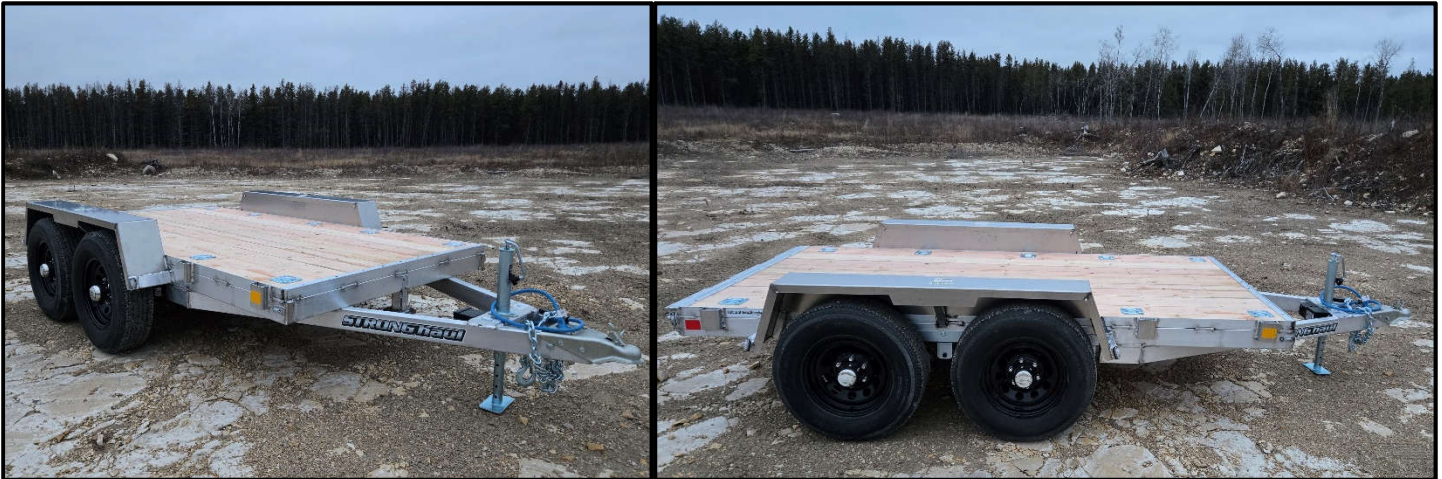

-Standard Features and Equipment-

-4.00" x 2.00" x .250w 6061-T6 Aluminum Frame Tubes and Hitch Tubes	-A-Frame Mounted Jack Rated at 5K lbs
-3.00" x 1.50" x .188w 6061-T6 Aluminum Cross member Channels on 16" ctrs	-2x10 Douglas Fir/Larch Plank Floor
-5200lb Strt, Leaf Spring Axles, Elec. Brakes	-3/8" x 35" Safety Chains, 16.2K lb Rating, with Safety Latch
-Zinc-Plated Axle Mounting Brackets with Polypropylene Tape	-Stake Pockets and Side Rub Rails, Removable Fenders
-7-Pin RV Style Electrical Connector	-6k lb Recessed Lashing Rings, ZP (10 lashing rings on 10' model)
-Junction Box, Break-away Kit with Battery and Charger	-Underside Spare Tire Mount, in A-Frame of hitch (Changes to stake pocket mount depending on tool box)
-2-5/16" Ball Coupler, Max 2,100lb tongue WT, with Polypropylene Tape	-Deck to Ground Height: 23"
-ST225/75R15 7-ply Radial Tires	-Ground to Coupler Height: 16" When Level (both models)
-Modular-Style Steel Wheels, R15", 6 lug on 5.5" BHP, Black	-GVWR: 9,980lbs (Designed to carry 1000gallon water tank)
-LED Lighting Package	
-Enclosed Wiring, Protected with Tubing/Hose and Sealed with Silicone	

-Available Sizes-

Description	Payload	Dry Wt.
WATF-66x10-52	9,065 lbs	825 lbs

-Available Options-

Description
Aluminum Wheel Upgrade PKG
Spare Wheel, Steel
Spare Wheel, Aluminum
Recessed Lashing Rings 6k lb
Jack Caster Wheel
Side Mount Pivot Jack
Lockable Handle Tool Box
2-5/16" Adjustable Coupler

*Note: Payload is an estimated amount and actual may vary, refer to VIN tag for more info.