



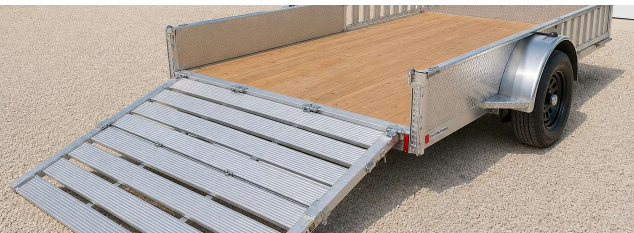

UASS-DR-3K

THE ALUMINUM ADVANTAGE

- ✓ Lightweight
- ✓ Fuel Economy
- ✓ Easier Handling
- ✓ Rust Resistant
- ✓ Paint Free
- ✓ Clean Aluminum Design

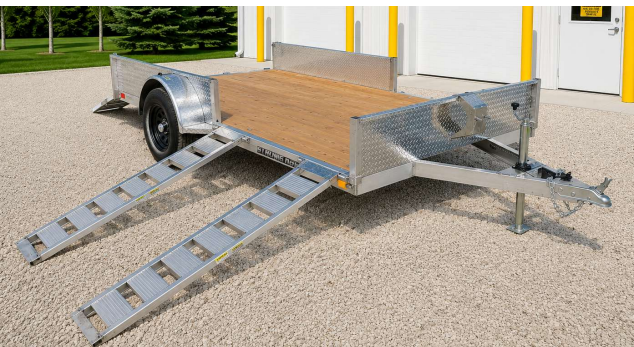

SMART DESIGN
Purpose Built • Work Ready



UASS-DR-3K



Address: 139144 Road 11E
Arborg, MB, Canada
P.O. Box 269 R0C 0A0

www.stronghaul.com



UASS-DR-3K

Utility Style, Aluminum Frame,
Single Axle, Solidside Trailer
with Drop in Side Ramps



UASS-76x12-DR
UASS-76x14-DR
UASS-82x12-DR
UASS-82x14-DR

PREMIUM ALUMINUM TRAILERS
Built for Work or Play

Available Sizes

Description	Payload	Dry Weight
UASS-76x12-DR	2,105 lbs	885 lbs
UASS-76x14-DR	1,935 lbs	1055 lbs
UASS-82x12-DR	2,075 lbs	915 lbs
UASS-82x14-DR	1,995 lbs	995 lbs



ALL ALUMINUM CONSTRUCTION

Light • Strong • Durable

www.stronghaul.com

Standard Features

Frame: Aluminum 6061

Rail Height: 13.5" (Deck to top of Flange)

Axle: 3500lb Drop Axle, Idler

Axle Brackets: .250" Galvanized and Taped

Harness Plug: 4-Way RV-Style Connector with Break-away Kit

Coupler: 2" Ball Coupler, Max rating 2,100lb tongue WT, with Polypropylene Tape

Tires: ST205/75R15 6-ply Radial

Wheels: Black Mod. Steel, R15", 5 lug on 4.5" BHP

Lighting: LED Lighting Pkg with Sealed Harness

Jack: 5,000lb, A-Frame Mounted

Decking: 2x10 No. 1 Gr, Douglas Fir/Larch Planks

Safety Chains: 5/16" x 30" Chains, 7.6K lb Rating, with Safety Latch

Ramp: Folding Rear Ramp rated at 3000lbs

Ramp Unfolded Length: 54" L x 55" W

Ramp Folds Down onto Deck

Lashing Rings: 2,000lb, ZP (8 on 12', 10' on 14' models)

Spare Tire Mount: Front, or on side with toolbox

Deck to Ground Height: 18"

Ground to Coupler Height: 15" When Level

GVWR: 2,990lbs (3,000lbs with E-brake option)

Available Options

Aluminum Wheel Upgrade PKG

Spare Wheel, Steel

Spare Wheel, Aluminum

Jack Caster Wheel

Side Mount Pivot Jack

Extra Lashing Rings 2k lb

Toolbox, A-Frame Mounted, Lockable

Electric Braking Axle Upgrade

Top Tie Rail Kit, Front

Top Tie Rail Kit, Sides



PREMIUM ALUMINUM TRAILERS

Built for Work or Play