



UATF

THE ALUMINUM ADVANTAGE

- ✓ Lightweight
- ✓ Fuel Economy
- ✓ Easier Handling
- ✓ Rust Resistant
- ✓ Paint Free
- ✓ Clean Aluminum Design




SMART DESIGN

Purpose Built • Work Ready



UATF

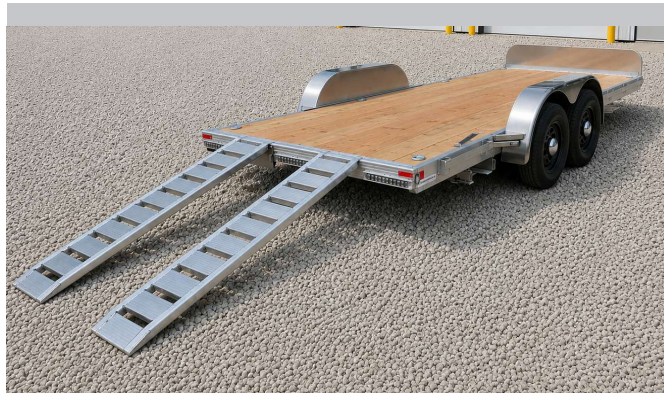

Address: 139144 Road 11E
Arborg, MB, Canada
P.O. Box 269 R0C 0A0

www.stronghaul.com



UATF

Utility Style, Aluminum Frame,
Tandem Axle, Flat Bed Trailer



UATF-82x12-7K	UATF-82x12-B-7K
UATF-82x14-7K	UATF-82x14-B-7K
UATF-82x16-7K	UATF-82x16-B-7K
UATF-82x18-7K	UATF-82x18-B-7K
UATF-82x12-10K	UATF-82x12-B-10K
UATF-82x14-10K	UATF-82x14-B-10K
UATF-82x16-10K	UATF-82x16-B-10K
UATF-82x18-10K	UATF-82x18-B-10K

PREMIUM ALUMINUM TRAILERS

Built for Work or Play

Available Sizes

Description	Payload	Dry Weight
UATF-82x12-7K	5,905 lbs	1095 lbs
UATF-82x14-7K	5,830 lbs	1170 lbs
UATF-82x16-7K	5,715 lbs	1285 lbs
UATF-82x18-7K	5,620 lbs	1380 lbs
UATF-82x12-10K	8,665 lbs	1225 lbs
UATF-82x14-10K	8,595 lbs	1295 lbs
UATF-82x16-10K	8,470 lbs	1420 lbs
UATF-82x18-10K	8,390 lbs	1500 lbs
UATF-82x12-B-7K	5,905 lbs	1095 lbs
UATF-82x14-B-7K	5,840 lbs	1160 lbs
UATF-82x16-B-7K	5,730 lbs	1270 lbs
UATF-82x18-B-7K	5,625 lbs	1375 lbs
UATF-82x12-B-10K	8,660 lbs	1230 lbs
UATF-82x14-B-10K	8,590 lbs	1300 lbs
UATF-82x16-B-10K	8,470 lbs	1420 lbs
UATF-82x18-B-10K	8,380 lbs	1510 lbs



ALL ALUMINUM CONSTRUCTION

Light • Strong • Durable

www.stronghaul.com

Standard Features

Frame: Aluminum 6061
Rail Height: 13.5" (Deck to top of Rail)
Axle -7K: 3500lb Straight, Leaf Spring, E-brake
Axle -10K: 5200lb Straight, Leaf Spring, E-brake
Axle Brackets: .250" Galvanized and Taped
Harness Plug: 7-Way RV-Style Connector with Break-away Kit
Coupler: 2-5/16" Ball Coupler, Max rating 2,100lb tongue WT, with Polypropylene Tape
Tires -7K: ST205/75R15 6-ply Radial
Tires -10K: ST225/75R15 7-ply Radial
Wheels -7K: Black Steel, R15", 5 lug on 4.5" BHP
Wheels -10K: Black Steel, R15", 6 lug on 5.5" BHP
Lighting: LED Lighting Pkg with Sealed Harness
Jack: 5,000lb, A-Frame Mounted
Decking: 2x10 No. 1 Gr, Douglas Fir/Larch Planks
Safety Chains: 3/8" x 35" Chains, 16.2K lb Rating, with Safety Latch
Ramp, Bifold -B: Folding Rear Ramp rated at 3000lbs
Ramp, Pocket Style: 2,500lb, under rear of deck
Spare Tire Mount: Front, or on side with toolbox
Lashing Rings: 4,000lb, ZP (6 rings on 12', 14', 16' models, 8 rings on 18', 20' models)
Ground to Coupler Height: 16" When Level
Deck to Ground Height: 23"
Stake Pockets, Side Rub Rails, Removable Fenders
GVWR: 7,000lbs on -7K
GVWR: 9,980lbs on -10K

Available Options

Aluminum Wheel Upgrade PKG
Spare Wheel, Steel
Spare Wheel, Aluminum
Spray Shield, 82"
Stone Shield, Rail Cover, 15" x 82"
Extra Lashing Rings 4k lb
Recessed Lashing Rings 6k lb
Jack Caster Wheel
Side Mount Pivot Jack
Stabilizer Stands, Drop Leg
Coupler, 2-5/16" Adjustable
Winch Plate, 12" x 18"
Toolbox, A-Frame Mounted, Lockable



PREMIUM ALUMINUM TRAILERS

Built for Work or Play