



WATF

THE ALUMINUM ADVANTAGE

- ✓ Lightweight
- ✓ Fuel Economy
- ✓ Easier Handling
- ✓ Rust Resistant
- ✓ Paint Free
- ✓ Clean Aluminum Design



SMART DESIGN
Purpose Built • Work Ready



WATF



Address: 139144 Road 11E
Arborg, MB, Canada
P.O. Box 269 R0C 0A0

www.stronghaul.com



WATF

**Water Hauler, Aluminum Frame,
Tandem Axle, Flatbed Trailer**



WATF-66x10-10K

WATF-66x12-10K

PREMIUM ALUMINUM TRAILERS
Built for Work or Play

Available Sizes

Description	Payload	Dry Weight
WATF-66x10-10K	9,065 lbs	900 lbs
WATF-66x12-10K	8,840 lbs	1050 lbs



ALL ALUMINUM CONSTRUCTION

Light • Strong • Durable

www.stronghaul.com

Standard Features

Frame: Aluminum 6061

Frame and Hitch Tubes: 4" x 2" x .25"w

Cross Member Tubes: 3" x 1.5" x .188"w

Axle: 5200lb Straight, E-brake, Leaf Spring

Axle Brackets: .250" Galvanized and Taped

Harness Plug: 7-Way RV-Style Connector with Break-away Kit

Coupler: 2-5/16" Ball Coupler, 2,100 lb tongue weight, with Polypropylene Tape

Tires: Goodride or Westlake ST225/75R15 7-ply Radial Tires

Wheels: Black Mod. Steel, R15", 6 lug on 5.5" BHP

Lighting: LED Lighting Pkg with Sealed Harness

Jack: 5,000lb, A-Frame Mounted

Decking: 2x10 No. 1 Gr, Douglas Fir/Larch Planks

Safety Chains: 3/8" x 35" Chains, 16.2K lb Rating, with Safety Latch

6 Stake Pockets for Additional Hook Points

Lashing Rings: Recessed, ZP (10 rings on 10')

Deck to Ground Height: 23"

Ground to Coupler Height: 16" When Level (both models)

Underside Spare Tire Mount, in A-Frame of hitch (Changes to stake pocket mount with tool box)

Deck to Ground Height: 35"

Ground to Coupler Height: 19" When Level

GVWR: 9,980lbs (Designed to carry 1000gallon water tank)

Available Options

Aluminum Wheel Upgrade PKG

Spare Wheel, Black Steel

Spare Wheel, Aluminum


Side Mount Pivot Jack

Jack Caster Wheel

Recessed Lashing Rings 6k lb

Toolbox, A-Frame Mounted, Lockable

Coupler, 2-5/16 Adjustable

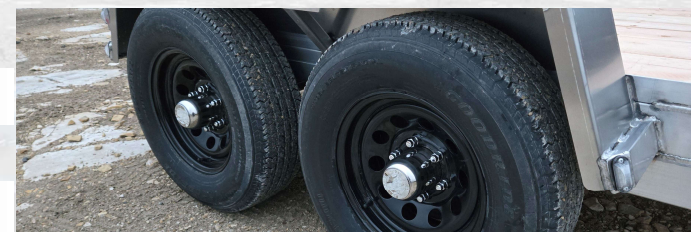

PREMIUM ALUMINUM TRAILERS

Built for Work or Play